


# SENTO 2 SQ



SVL Lighting

## TECHNICAL SPECIFICATIONS



- Recessed LED adjustable downlight
- Housing and trim are constructed in steel and the trim is finished in satin white or bright silver powder coat
- Recessed black housing creating a dynamic visual impact with low glare
- Gimble and rotatable rings gives directional flexibility for both ambient and feature lighting
- IP20 LED Module
- Leading & trailing edge driver



Code	Wattage	Colour Temp	Trim	Lumens
SEN21133S	13.5W/18.5W	3000K	S	950/1600lm
SEN21134S	13.5W/18.5W	4000K	S	950/1600lm
SEN21133W	13.5W/18.5W	3000K	W	950/1600lm
SEN21134W	13.5W/18.5W	4000K	W	950/1600lm


### Application

Ideal application in foyers, hotels, corridors, function rooms living areas, kitchens and bedrooms

### Trim Colours



### Luminous Intensity Distribution Diagram

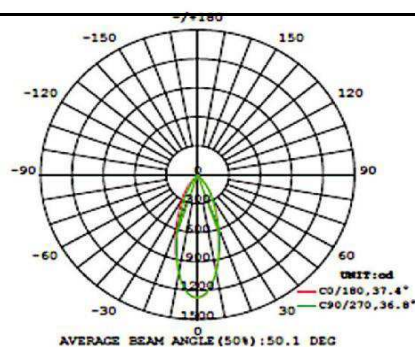

<b>Depth:</b>	110mm
<b>Trim Dimensions:</b>	290mm x 140mm
<b>Cut out:</b>	275mm x 125mm
<b>Trim Colours:</b>	White / Silver
<b>Colour Rendering Index (CRI):</b>	95
<b>Colour Temp (CCT):</b>	2700K, 3000K, 4000K
<b>Beam Angle:</b>	15°, 25°, 38°, 60°
<b>Power Consumption:</b>	13.5W @ 300mA 18.5W @ 500mA
<b>Power Factor:</b>	> 0.9
<b>Lumen of Chip &amp; Luminaire</b>	13.5W @ 950lm 18.5W @ 1600lm
<b>Dimmable:</b>	Leading / Trailing, DALI, 1-10V
<b>Lifespan:</b>	Up to 50,000 hrs

\* IES Files are available on request