




SQIN D

TECHNICAL SPECIFICATIONS




SVL Lighting



IP20


- Four square downlight solution to replace CFL and metal halide lighting.
- CITIZEN brand COB LED used to increase the efficiency of the light output. The choice of 1800lm and 3000lm heads are available according to your requirements.
- Ideal for applications in Hospitality, Commercial and Retail
- Available with a surface mounted case

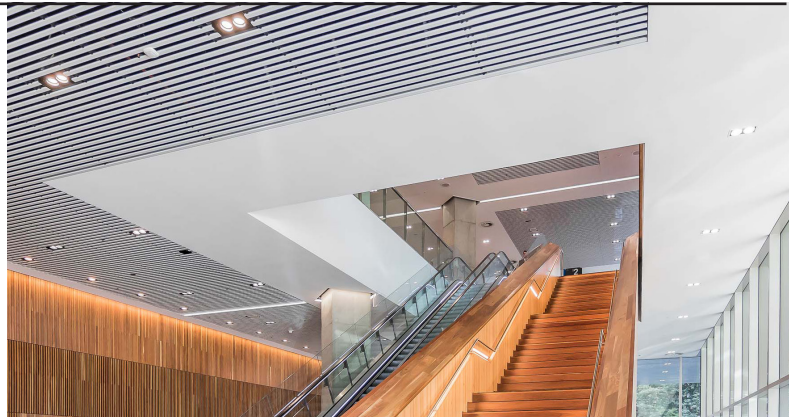

Code	Wattage	Colour Temp	Trim Colours	Lumens
LED12020	4x28W	3000K	W	4x2500lm
LED12021	4x28W	4000K	W	4x2500lm
LED12022	4x36W	3000K	W	4x3400lm
LED12023	4x36W	4000K	W	4x3400lm

Trim Colours W S

CoB 3000lm 900mA WW 40°

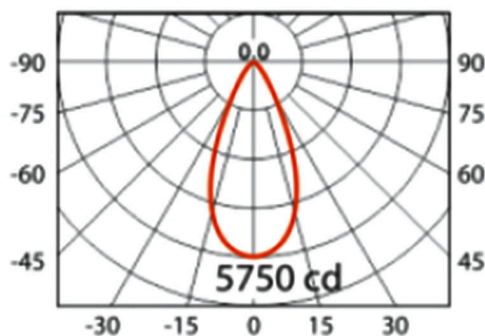

Luminous Intensity Distribution Diagram

Depth:	206mm
Dimensions:	322mm x 322mm
Cut out:	302mm x 302mm
Colour Rendering Index (CRI):	83
Colour Temp (CCT):	3000K 4000K
Finish Colour:	White Silver
Beam Angle Selections:	28° 40°
Power Consumption Selections:	4 x 28W 4 x 36W
Power factor:	> 0.95
Lumen of Chip & Luminaire	4 x 28W @ 2500lm 4 x 36W @ 3400lm
Dimmable:	Leading & Trailing Edge, DALI
Lifespan:	Up to 50,000 hrs (L70/B10)

* IES Files are available on request